




Includes: Plastic Trunk Table Base Aluminum Legs Table Top




Remove straps, open trunk and remove parts. Turn trunk bottom upside down. Push legs into holes located on the trunk bottom.




Place trunk top above legs. Align legs with holes in trunk top. Push trunk top down to firmly anchor on legs.



upside down starting at the trunk top. Slide graphic downwards.




Rotate entire stand 180° so that graphic is now right side up. Pull graphic up and over trunk bottom.



Place table top lid on top of stand and press down.



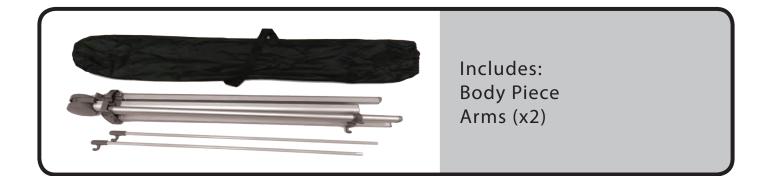



Place the X-Banner body piece upright by extending the feet outward. Adjust the height of the telescoping pole on the X-Banner body piece by flipping the switch to the center position. Having the switch turned to the left or right position will lock the height of the telescoping pole.



Take the two arms with hooks and attach them to the center piece at the top of the telescoping pole on the X-Banner body piece.



Using your banner with grommets, attach each of the four corners to the X-Banner hooks, starting with the top first.




In order to properly display your banner on the X-Banner body piece, raise the telescoping pole until taut.





Includes: Graphic Mini X-Banner Frame

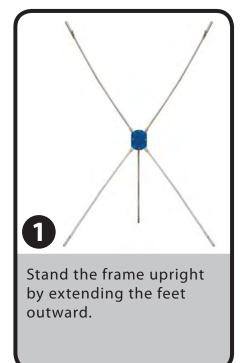



Using your graphic with openings, attach each of the four corners to the hooks on the X-Banner frame.



Ensure that the X-Banner frame is fully extended and taut in order to properly display your graphic.

PTH Hardware - 6'-15' Portable Half Drop and Teardrop



Includes: Sectional Aluminum and Fiberglass Pole Ground Spike Carrying Case

The number, length and style of sectional pole pieces will vary based on banner size and shape.



1

Assemble sectional poles by placing end to end - largest to smallest.

Note: If any sectional poles slide down several inches, then they are upside down.



Slide the banner onto the pole via the pole sleeve, starting from the small end.

Note: Be sure to feed the hardware all the way through the sleeve, to the tip of the banner.



Loosen the screw of the attachment hook near the base of the pole and slide it towards the loop at the bottom of your banner. Then put that loop into the attachment hook and adjust the hook position to make banner flat (taut). Tighten the screw of the attachment hook to secure the banner. For 15' hardware, there may be an attachment hook OR a tether line.




Hammer taller portion of the ground spike fully into the ground. Then insert pole with banner onto peg. For best vertical presentation, check with a level front-to-back and side-to-side.







This product is for outdoor promotional use only and should not be left out in extreme weather conditions. Please use common sense guidelines and do not display this product outdoors when extreme winds or storms may be present.

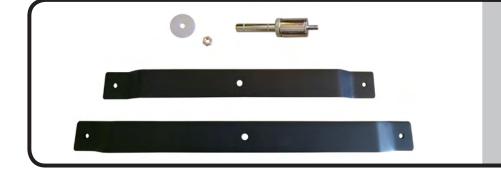


Includes: 20″ Bar 23″ Bar Post Nut Spacer*



Place 20" bar on a surface with feet facing downwards. Place spacer on top, aligning spacer hole with center hole of the bar.



Place 23" bar on top, sandwiching the spacer between both bars. Align holes.



bottom, 23" bar on top, and spacer in between, marry the two bars together with the post.





To use, separate both legs until perpendicular.



pole with banner (see reverse side for instructions) onto the post of the cross base.


* Spacer may not be included with cross base. It is an optional piece and not required for use.



Includes: Poles Support Brace (3 pc w/paracord) Elbow Joints (x2) 90° Bends (x2) Feet (x2) Carry Bag & Graphic



Using the numbers on the frame, connect the exterior tubes. Set completed frame onto the posts of the two Feet.



Connect the 3 poles of the Support Brace. Lay the frame down and insert the assembled Support Brace into the center holes of the frame.



Starting from the top corner, pull the Graphic down, over the frame.



Adjust the Graphic and frame as needed to ensure the Graphic is straight and secure.

