

INSTRUCTIONS

SlimFit Wall




Includes:
Poles
2 Elbow joints
2 90-degree bends
2 Feet
Graphic
Carrying bag

1



Using the numbers on the frame, connect the exterior tubes.

2

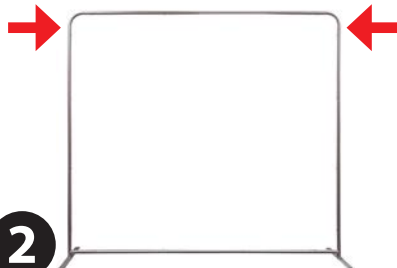


Then lay the frame down and insert the center rods.

3



Starting from the top corner, pull the fabric graphic over the frame.

4

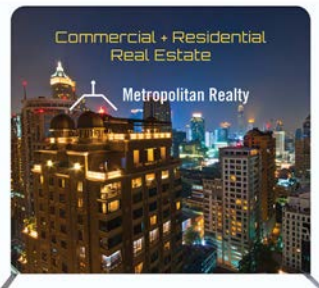

Adjust the graphic and frame as needed to ensure the graphic is straight and secure.

