

# INSTRUCTIONS

## SlimFit Wall



Includes:

Poles

2 Elbow joints

2 90-degree bends

2 Feet

Graphic


Carrying bag

1



Using the numbers on the frame, connect the exterior tubes.

2

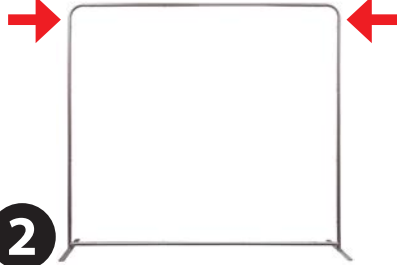

Then lay the frame down and insert the center rods.

3




Starting from the top corner, pull the fabric graphic over the frame.

4



Adjust the graphic and frame as needed to ensure the graphic is straight and secure.

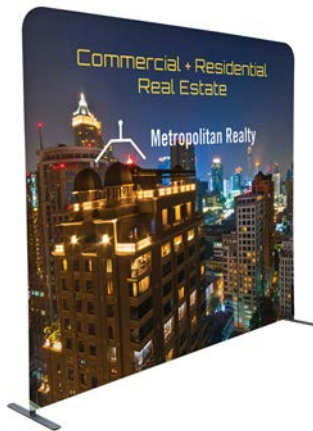

# INSTRUCTIONS

## SlimFit Steel Base



Includes:  
Poles  
Steel base  
Graphic  
Allen wrench

1

Using the numbers on the frame, connect the tubes.



2

Using allen wrench, secure frame to steel base by tightening the aluminum studs.



3

Starting from the top corner, pull the fabric graphic over the frame.



4

Adjust the graphic and frame as needed to ensure the graphic is straight and secure.



# INSTRUCTIONS

## InstaStand



Includes:  
Carrying case  
InstaStand  
Graphic



1

Table will arrive in closed position. To determine top and bottom, pneumatic pistons should extend upward (see step #2). Place the bottom panel on the floor. Place hands under opposites sides of the top panel and gently pull upwards.




2

Table will automatically rise to the fully open position.



3

Flip table upside down so top panel is on the floor. Holding the bottom hem of the graphic, find the back seam and feel for the rigid cord inside the hem. Line up the back seam with the middle of one long side of the bottom panel and push the cord into the groove on the bottom panel.

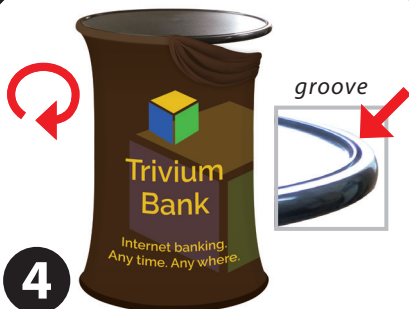

4

Flip table right side up. Find the rigid cord in the top hem of the graphic and push it into the groove on the top panel. To ensure the graphic displays properly, do not twist the graphic.



5

For easy set-up you can leave the graphic on when you push the table to the closed position.

